


Elevatorbecher System C

Gepresst aus St 37, V2A, V4A

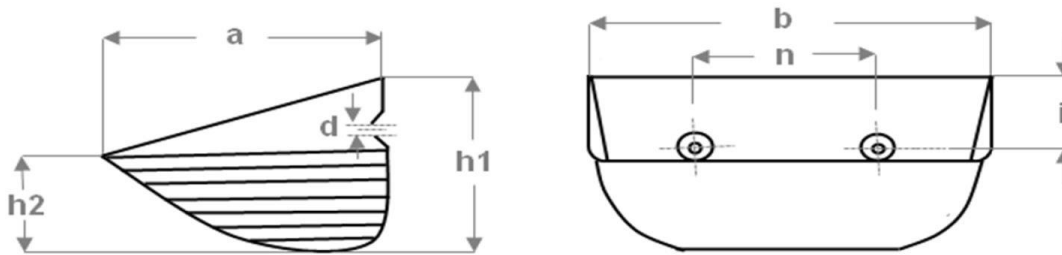

b mm	a mm	h1/h2 mm	Netto- inhalt (Liter)	bombierte Löcher				Blechstärke					max. Becher /mtr.
				d mm	Loch- anzahl	n mm	i mm	1,0 mm	1,5 mm	2,0 mm	2,5 mm	3,0 mm	
								Gewicht in kg/100 Stück					
100	86	60/34	0,22	8,0	2	50	18,0	15,0	22,5	30,0			15
120	101	72/47	0,36	9,5	2	67	21,0	21,0	31,5	42,0			13
130	110	76/48	0,46	9,0	2	70	22,0	24,0	36,0				12,5
140	114	86/58	0,66	9,5	2	86	24,0	28,7	43,0	57,2			11
160	125	90/59	0,83	9,5	2	101	25,0		53,0	70,7			10,5
180	136	87/48	0,76	9,0	2	100	32,0		57,0	76,0	95,0	114,0	10,5
200	140	100/67	1,33	11,5	2	131	28,0		73,0	97,0		146,0	9
230	157	105/67	1,80	11,0	2	120	35,0		88,5	118,0		177,0	9
250	150	107/70	1,90	11,5	3	2x77	30,0		95,5	126,0			9
280	157	105/67	2,10	11,0	3	2x80	37,0		103,5	138,0	172,0	207,0	9
300	180	116/74	3,02	11,5	3	2x100	35,0		134,3	179,0	224,0		7,5
330	220	130/80	4,20	11,5	3	2x120	37,0		162,0	216,0	271,0	324,0	7
350	188	134/87	4,40	11,5	4	3x90	37,0			221,0	276,0		7
370	214	137/84	5,10	11,5	4	3x90	38,0		189,0	252,0	315,0	378,0	7
400	198	142/93	5,26	13,6	4	3x100	39,0			250,0	313,0		6,5
450	214	135/85	6,10	11,0	5	4x90	38,0			272,0	340,0	408,0	7
500	223	160/104	8,34	13,6	5	4x100	43,0			400,0		600,0	5,5

Die Ausmaße der Becher und die anderen Daten sind empfohlen und nicht verbindlich.